



**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**

**Model**  
**EMFN-135-GN 230V 1N 50Hz**

19037545

13/12/2019

**FREEZER COUNTERS CONCEPT, EMFN-135-GN**


- High quality austenitic stainless steel inside and outside (except for galvanised back panel).
- Copper piping and aluminium flaps evaporator.
- Digital display for electronic and digital control of temperature and defrosting.
- The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.
- Opened door delay alarm.
- Easier loading and unloading thanks to its door self-closing and stay open features.
- Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).
- Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.
- Built-in drainage to get rid of waste liquids inside the unit.
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- 10 cm high splashback.
- 50 mm, 40 kg/m<sup>3</sup> injected polyurethane insulation.
- Forced draught cooling system inside the chamber.
- Working temperature: from -18 °C to -22 °C. Ambient temperature: 43 °C (except intensive uses)
- N° doors: 2

**Options:**

- Castor kit (factory assembly).
- Without splashback
- Without worktop.
- Drawers set.
- Compressor on the left.
- Panoramic opening.
- Back stainless steel.
- Granite worktop.
- "- Lock.
- "

**DIMENSIONS**

|            |                      |                |                      |
|------------|----------------------|----------------|----------------------|
| X Width    | 1342 mm              | X Gross width  | 1455 mm              |
| Y Depth    | 700 mm               | Y Gross depth  | 825 mm               |
| Z Height   | 850 mm               | Z Gross height | 1000 mm              |
| Net Weight | 107,0 kg             | Gross Weight   | 112,0 kg             |
| Net volume | 0,798 m <sup>3</sup> | Gross volume   | 1,200 m <sup>3</sup> |



**ELECTRICITY TECHNICAL SPECIFICATIONS**

|                    |           |
|--------------------|-----------|
| Electric power     | 0,667 kW  |
| Amperage           | 2,7 A     |
| Voltage            | 230V - 1N |
| Electric frequency | 50Hz      |

**GAS TECHNICAL SPECIFICATIONS**






|          |       |
|----------|-------|
| Gas type | R-290 |
|----------|-------|

**COLD TECHNICAL SPECIFICATIONS**

|                           |                 |
|---------------------------|-----------------|
| Refrigeration power       | 0,364 kW        |
| Annual elec. consumption  | 2212,00 kWh     |
| Power consumption 24h     | 6,06 kWh        |
| Gross internal volume     | 274 L           |
| Frozen net.vol            | 143 L           |
| Climate class             | 4               |
| Cooling gas load          | 87,000 g        |
| Clasif. Energy efficiency | D               |
| Energy Efficiency Index   | 68,83 %         |
| Model type                | Counter Cabinet |

**CONNECTIONS TECHNICAL SPECIFICATIONS**

|                          |          |
|--------------------------|----------|
| Single-phase 230V wiring | 2X1+T-4A |
|--------------------------|----------|

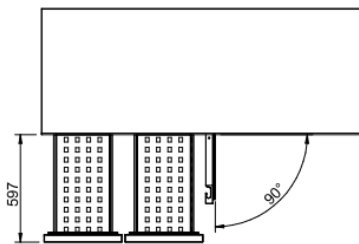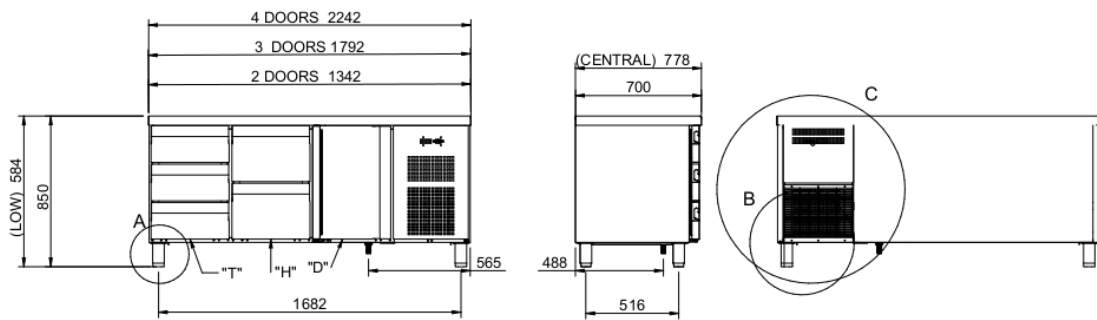

OPTIONS

